

Hiab XS 044

Range 3.7-4.0 tm





Basic data

Hiab XS 044 Basic data

Technical data

	B-1 CLX	D-4 CLX	B-1 Duo	D-4 Duo	B-1 HiDuo	D-3 HiDuo
Max. lifting capacity (kNm)	37	36	37	36	37	37
Outreach - hydraulic extensions (m)	4.9	9.4	4.9	9.4	4.9	7.9
Outreach - manual extensions (m)	8.0	-	8.0	-	8.0	9.4
Outreach / lifting capacity, standard (m / kg)	3.4 / 990	3.5 / 980	3.4 / 1080	3.5 / 980	3.4 / 1080	3.5 / 1040
	4.7 / 780	4.8 / 680	4.7 / 780	4.8 / 680	4.7 / 780	4.8 / 720
	-	6.2 / 500	-	6.2 / 500	-	6.2 / 540
	-	7.7 / 390	-	7.7 / 390	-	7.7 / 440
	-	9.1 / 330	-	9.1 / 330	-	-
Slewing angle	380°	380°	380°	380°	380°	380°
Height in folded position (mm)	1610	1610	1610	1610	1610	1610
Width in folded position (mm)	1890	1890	1890	1890	1890	1890
Installation space needed (mm)	535	600	535	600	535	580
Weight - "standard" crane without stabilizers (kg)	450	575	450	575	450	540
Weight - stabilizer equipment (kg)	56	56	56	56	56	56

Hiab XS 044 D-3 HiDuo

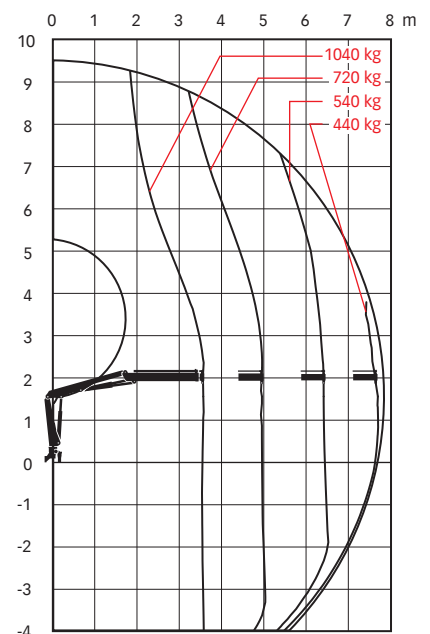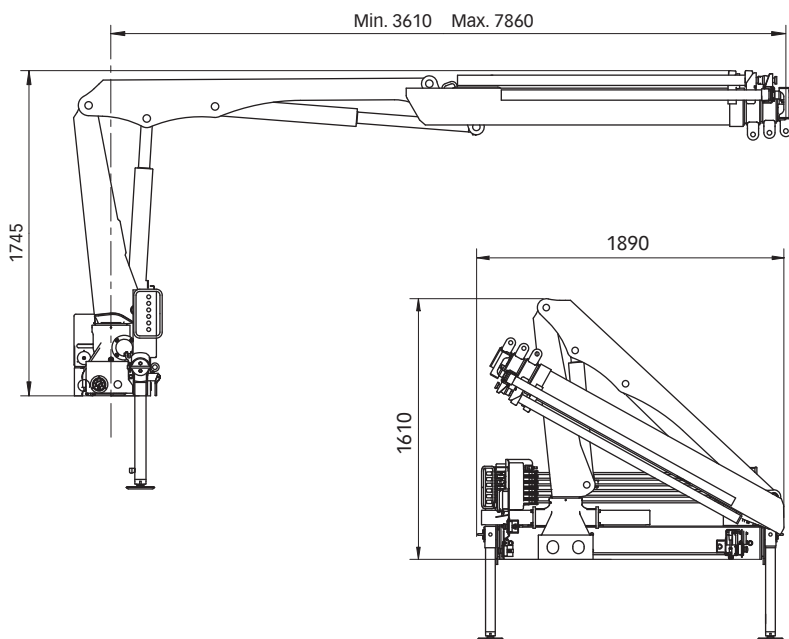

Atlas Polar
IT'S ALL ABOUT QUALITY™

Atlas Polar Company Ltd.
60 Northline Road
Toronto, ON M4B 3E5
Canada
1-888-799-4422
info@atlaspoler.com
www.atlaspoler.com