

Hiab XS 099

Range 7-10 tm





Basic data

Hiab XS 099 Basic data

Technical data

	B-3 CL	B-2 Duo	B-3 Duo	E-4 HiDuo	E-5 HiDuo
Max. lifting capacity (kNm)	77	87	77	81	78
Outreach - hydraulic extensions (m)	9.8	7.8	9.8	12.1	14.3
Outreach - manual extensions (m)	11.9	9.8 - 11.9	11.6	14.1	-
Outreach / Lifting capacity, standard (m / kg)	3.0 / 2640	2.7 / 3250	3.0 / 2860	2.5 / 3650	2.6 / 3400
	4.2 / 1860	4.1 / 2160	4.2 / 2020	4.4 / 2060	4.5 / 1920
	5.8 / 1300	5.7 / 1540	5.8 / 1420	6.0 / 1420	6.1 / 1300
	7.6 / 960	7.6 / 1140	7.6 / 1060	7.9 / 1020	8.0 / 920
	9.5 / 760	-	9.5 / 840	9.9 / 780	10.0 / 680
	-	-	-	12.0 / 640	12.1 / 540
	-	-	-	-	14.2 / 450
Slewing angle	406°	406°	406°	406°	406°
Height in folded position (mm)	2100	2100	2100	2100	2100
Width in folded position (mm)	2300	2300	2280	2300	2400
Installation space needed (mm)	770	690	770	725	835
Weight - "standard" crane without stabilizers (kg)	1230	1140	1230	1480	1580
Weight - stabilizer equipment (kg)	135 - 205	135 - 205	140 - 285	140 - 285	140 - 285

Hiab XS 099 E-5 HiDuo

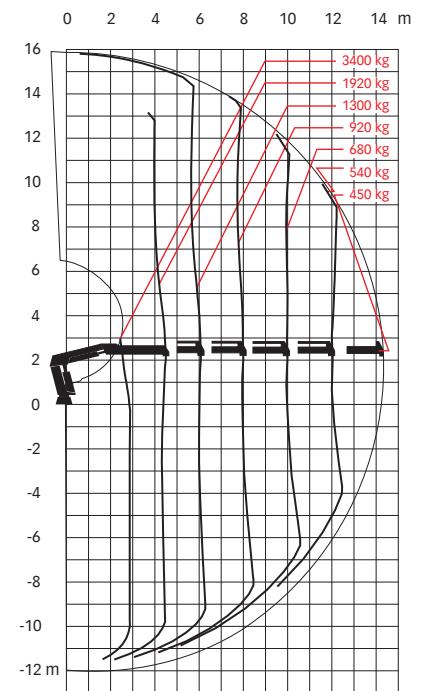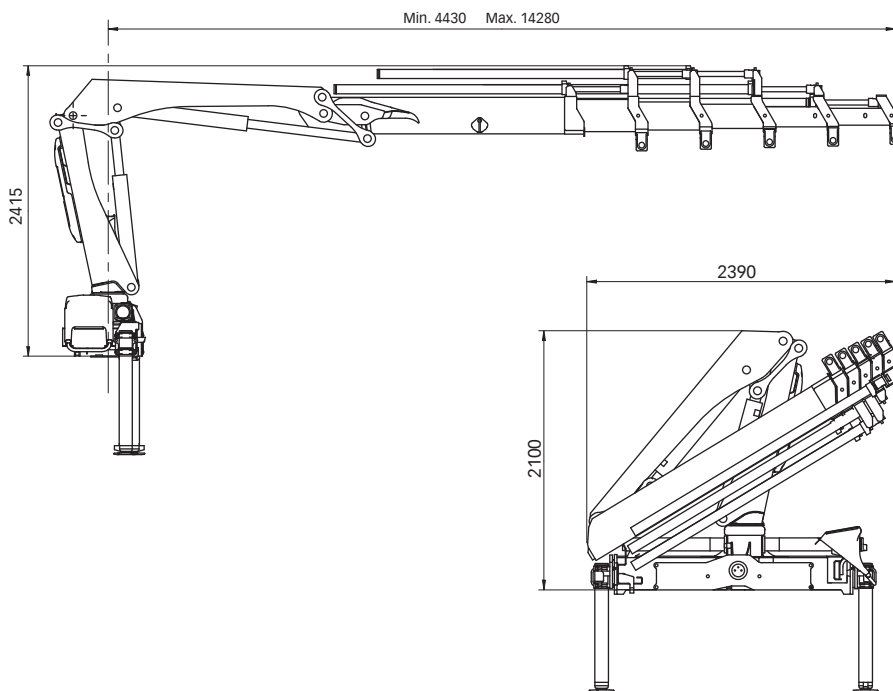

Atlas Polar
IT'S ALL ABOUT QUALITY™

Atlas Polar Company Ltd.
60 Northline Road
Toronto, ON M4B 3E5
Canada
1-888-799-4422
info@atlaspol.com
www.atlaspol.com