


HIAB XS 122 Range 9-12 tm

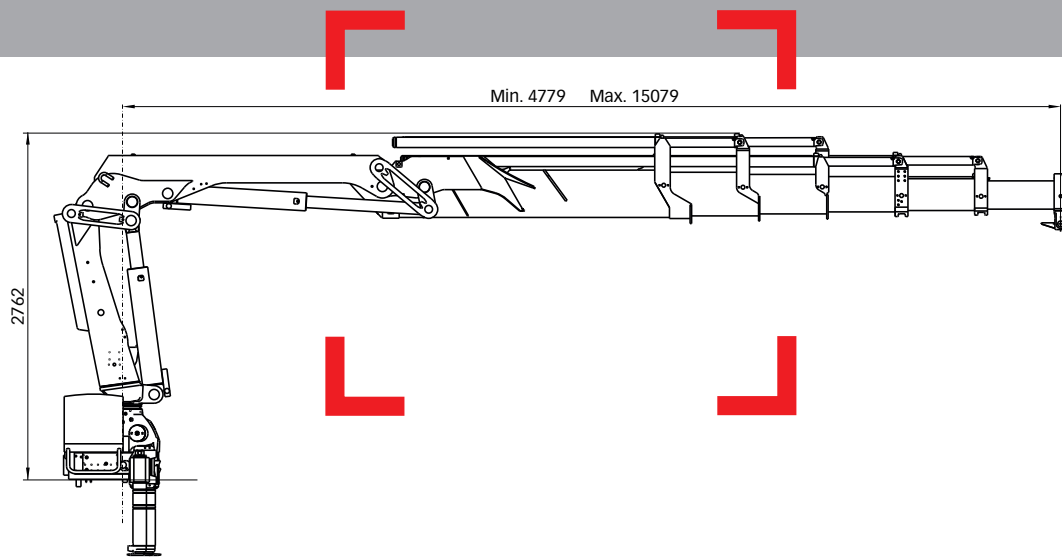




Basic data

HIAB X5 122 Basic data

Technical data	B-1 CL	B-2 CL	B-3 CL	E-4 CL	E-5 CL
Max. lifting capacity (kNm)	110	104	102	93	91
Outreach - hydraulic extensions (m)	6.3	8.4	10.6	12.8	15.1
Outreach - manual extensions (m)	12.8	12.8	12.8	17.4	17.4
Outreach / lifting capacity (m / kg)	2.8 / 4000	2.8 / 3800	3.0 / 3400	2.4 / 3950	2.5 / 3700
	4.3 / 2600	4.4 / 2400	4.5 / 2300	4.7 / 2000	4.8 / 1940
	6.1 / 1820	6.2 / 1680	6.3 / 1560	6.5 / 1380	6.6 / 1280
	-	8.2 / 1280	8.3 / 1160	8.4 / 1000	8.5 / 900
	-	-	10.3 / 920	10.5 / 760	10.6 / 660
	-	-	-	12.7 / 620	12.8 / 520
	-	-	-	-	15.0 / 440
Slewing angle	415°	415°	415°	415°	415°
Height in folded position (mm)	2207	2208	2208	2231	2276
Width in folded position (mm)	2500	2500	2500	2500	2500
Installation space needed (mm)	773	773	861	770	854
Weight - "standard" crane without stabilizers (kg)	1310	1440	1560	1880	1970
Weight - stabilizer equipment (kg)	195 - 366	195 - 366	195 - 366	195 - 366	195 - 366

Technical data	B-1 CL	B-2 CL	B-3 CL	E-4 CL	E-5 CL
Max. lifting capacity (ft-lbs)	81040	76990	74890	68590	67360
Outreach - hydraulic extensions	20'8"	27'7"	34'9"	42'0"	49'6"
Outreach - manual extensions	42'0"	42'0"	42'0"	57'1"	57'1"
Outreach - lifting capacity (ft / lbs)	9'2" / 8820	9'2" / 8380	9'10" / 7500	7'10" / 8710	8'2" / 8160
	14'1" / 5730	14'5" / 5290	14'9" / 5070	15'5" / 4410	15'9" / 4280
	20'0" / 4010	20'4" / 3700	20'8" / 3440	21'4" / 3040	21'8" / 2820
	-	26'11" / 2820	27'3" / 2560	27'7" / 2200	27'11" / 1980
	-	-	33'10" / 2030	34'5" / 1680	34'9" / 1460
	-	-	-	41'8" / 1370	42'0" / 1150
	-	-	-	-	49'3" / 970
Slewing angle	415°	415°	415°	415°	415°
Height in folded position	87"	87"	87"	88"	90"
Width in folded position	98"	98"	98"	98"	98"
Installation space needed	30"	30"	34"	30"	34"
Weight - "standard" crane without stabilizers (lbs)	2890	3170	3440	4140	4340
Weight - stabilizer equipment (lbs)	430 - 810	430 - 810	430 - 810	430 - 810	430 - 810

> **HIAB XS 122 E-5 CL**

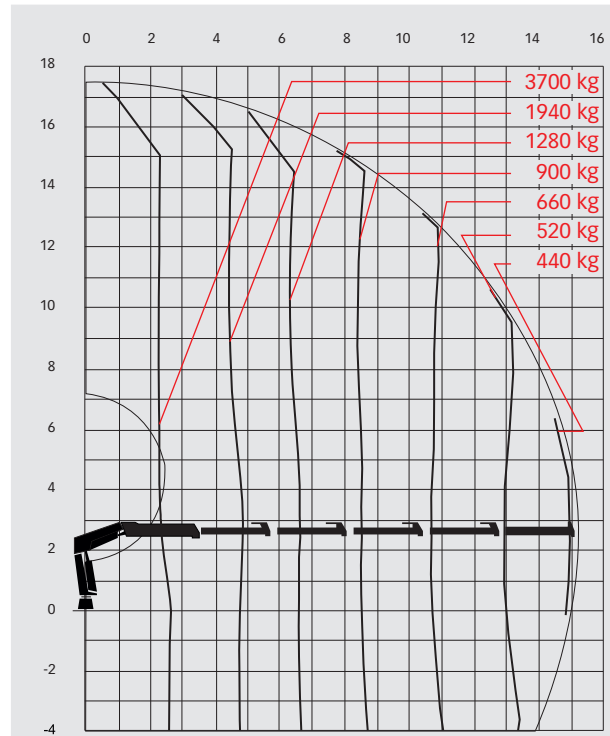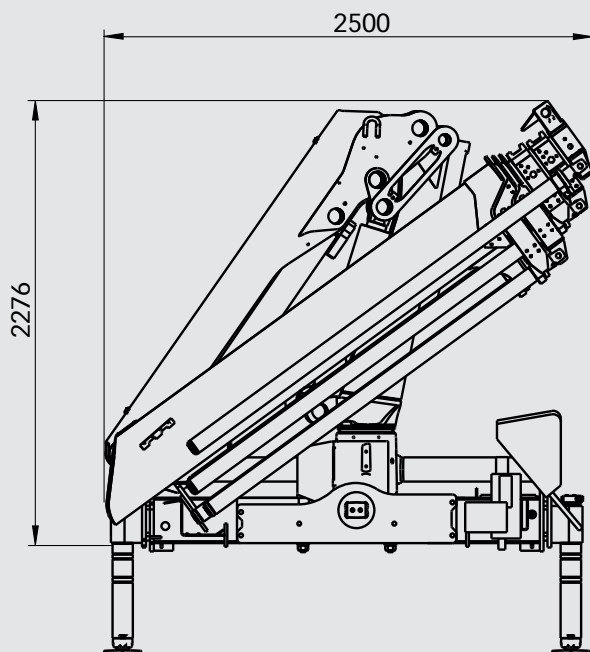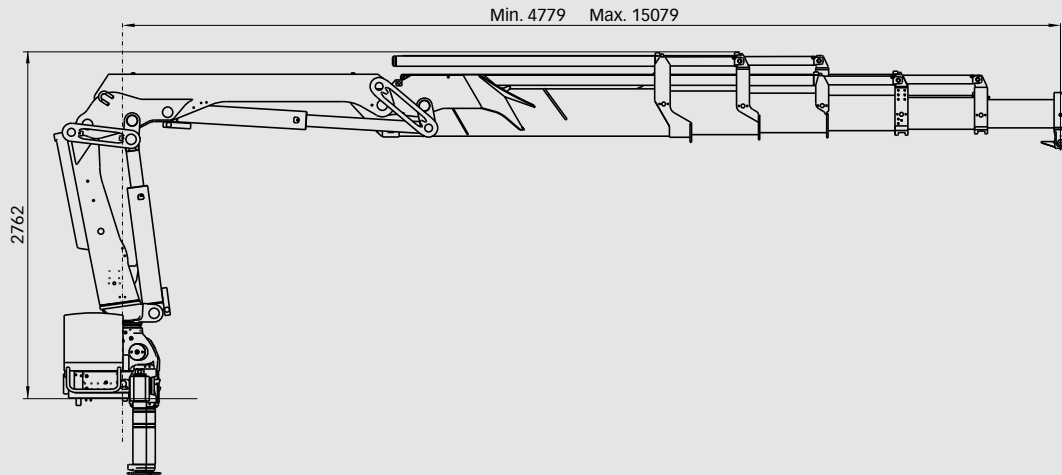

Disclaimer

Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001. Hiab's certified Quality Assurance System complies with the ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.



Hiab is part of Cargotec Corporation

