

► Multilift XR Power range hooklifts ► **XR26S**




 **MULTILIFT**

[www.hiab.com](http://www.hiab.com)

**TECHNICAL DATA**

<b>TYPE</b>	XR26S				
<b>VEHICLE TYPE</b>	4 axle				
<b>GVW OF THE VEHICLE (t)</b>	32				
<b>CAPACITY (t)</b>	26				
<b>G-LENGTH</b>	51	53	56	59	61
<b>SYSTEM WEIGHT (kg) *</b>	2550	2650	2680	2730	2750
<b>TIPPING ANGLE (°)</b>	49	52	52	52	49
<b>MAX. OPERATING PRESSURE (MPa)</b>	30				
<b>RECOMMENDED MAX. OIL FLOW (l/min)</b>	100 (special 150)				

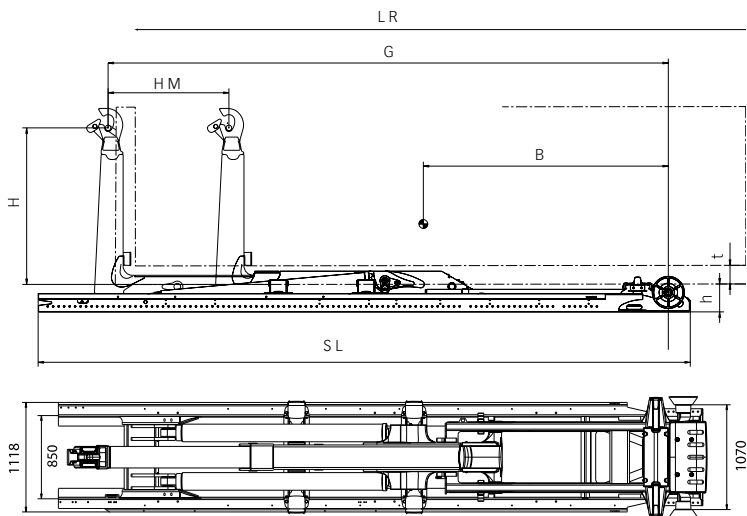

\* Weight includes hydraulic body locking and excludes oil tank and oil

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Multilift dealer.

\*\*\* Other hook heights for different body standards available

Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

**PRIMARY DIMENSIONS**

MODEL	XR26S.51	XR26S.53	XR26S.56	XR26S.59	XR26S.61
<b>LR = BODY LENGTH (min-max)</b>	4,3 - 6,1	4,5 - 6,4	4,5 - 6,6	4,7 - 6,9	4,9 - 7,1
<b>SL = SUBFRAME LENGTH (mm)**</b>	5933	6563	6563	6563	6583
<b>B = CENTRE OF GRAVITY (mm)</b>	2700	2850	2950	3000	3150
<b>G = EXACT G-LENGTH (mm)</b>	5080	5360	5560	5860	6080
<b>HM = HORIZONTAL MOVEMENT (mm)</b>	1100	1100	1300	1450	1450
<b>t = MIN. FREE TUNNEL HEIGHT (body)</b>	125 (special 105)				
<b>h= INSTALLATION HEIGHT (mm)</b>	270 (special 290)				
<b>H = HOOK HEIGHT (mm)***</b>	1570				

Contact your local Multilift dealer



A Hiab Company

Multilift Oy

Nesteentie 36, P.O.Box 39, FI-21201, Raisio, Finland

Tel +358 (0) 204 55 2399, Fax +358 (0) 204 55 2231

www.hiab.com