

HIAB XS 088 CLX Capacity 8 tm




Product brochure

The HIAB XS 088 CLX exceeds your expectations

Hiab has consistently led the way forward with innovative truck crane design achieving unrivalled levels of crane performance. The HIAB XS 088 CLX is an extraordinary crane where meticulous attention to detail has resulted in a crane package that not only meets your needs, but exceeds all your expectations in terms of performance, reliability and low cost of ownership.

The compl

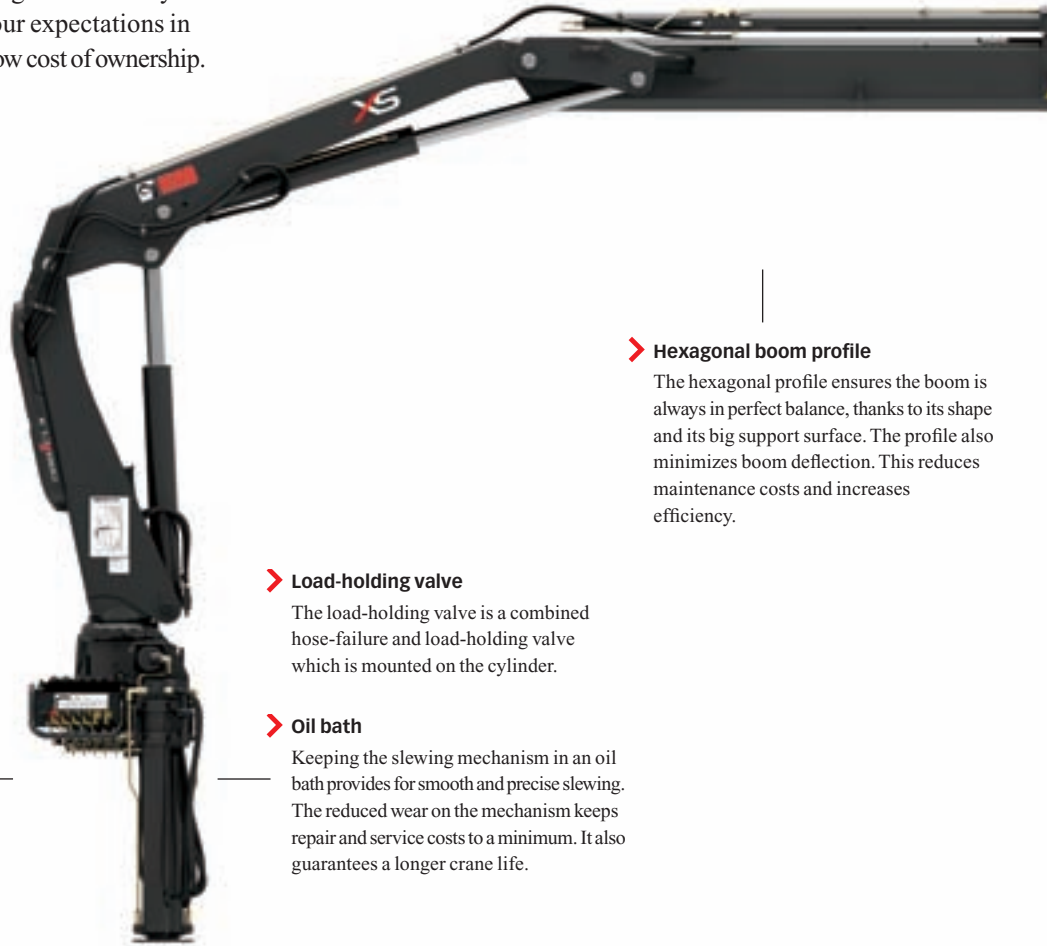

> Column close to centreline

On Hiab cranes with a rack-and-pinion slewing housing the centre of gravity is as close to the centreline as possible. This means that the same outreach is offered on both sides of the truck.

> Load-holding valve

The load-holding valve is a combined hose-failure and load-holding valve which is mounted on the cylinder.

> Oil bath

Keeping the slewing mechanism in an oil bath provides for smooth and precise slewing. The reduced wear on the mechanism keeps repair and service costs to a minimum. It also guarantees a longer crane life.

> Hexagonal boom profile

The hexagonal profile ensures the boom is always in perfect balance, thanks to its shape and its big support surface. The profile also minimizes boom deflection. This reduces maintenance costs and increases efficiency.

> Designed for the tough jobs, every day

Designing cranes for rough and tough operation is one of Hiab's hallmarks. This crane is no exception. The crane is designed to be on the job, day in and day out, where it belongs. However, servicing the crane can't be foreseen. In order to make the servicing time as short as possible we have fitted the crane with JIC couplings and easily replaceable large slide pads. Before you know it the crane will be back on the job, doing what it does best, creating solutions and versatility for your business.

> CLX control system

The CLX control system gives you an excellent and versatile crane, providing all the functionality you need to perform a wide range of general cargo handling tasks. CLX cranes are controlled manually via side controls. There are also optional solutions such as a control platform available. The hydraulic system of a CLX crane features load holding valves with an integrated hose failure function, as well as port relief valves to prevent the crane from over loading. The main control valve is the HIAB Valve 80 which enables the crane to perform more than one crane function at the same time, smoothly and efficiently.

ete solution




> Large slide pads

Large slide pads reduce friction and wear keeping maintenance costs low. Also the Hiab boom system needs no greasing, and thus it is kept cleaner than those of our competitors'.

> Attachable tools

A wide range of attachable tools are available for your Hiab crane. These make sure you can carry out a lot of different tasks.



< Large slide pads

The hexagonal profile enables the use of larger slide pads. This makes the extensions move more smoothly and reduces mechanical wear on the boom.



< Valve 80

The HIAB Valve 80 is a top-of-the-line open-centre valve based on well-proven technique which gives superb reliability. The valve handles large oil flows and provides great precision and ease of operation.

< Side controls

The levers are positioned at the crane base. Cross-controls give the same sequence of levers on both sides. As an option the levers can be positioned at a control platform.



Hiab is part of Cargotec Corporation

