


HIAB **XS** 122 CLX Capacity 86,800 ft-lbs (12 tm)



Product brochure

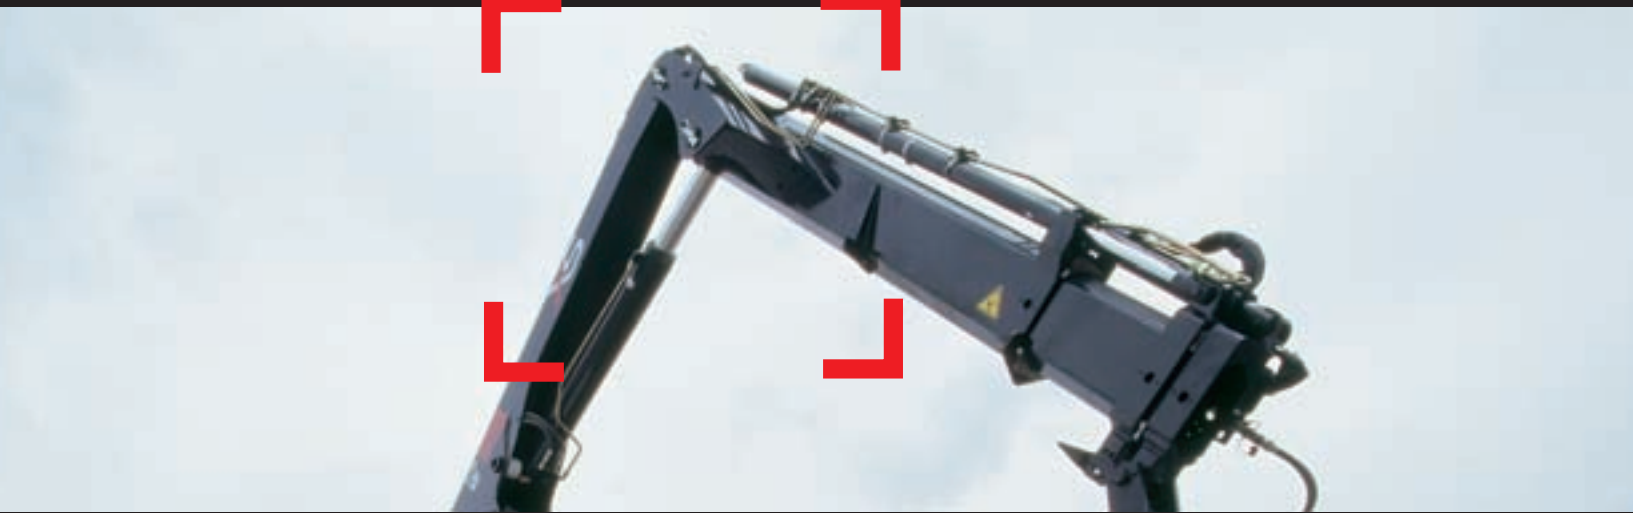

Brings performance to new heights



The HIAB XS 122 CLX – a true all-rounder

The HIAB XS 122 is a true all-rounder in the midsize segment. Whether you need a crane simply for loading and unloading in close, or need to perform outstanding precision and capacity at maximum outreach, the HIAB XS 122 CLX is the crane for you. The crane features the well proven HIAB Valve 80 and manual side controls, or optionally controls located at a high seat.

Designed for the tough jobs, every day

Designing cranes for rough and tough operation is one of Hiab's hallmarks. This crane is no exception. The crane is designed to be on the job, day in and day out, where it belongs. However, servicing the crane can't be foreseen. In order to make the servicing time as short as possible we have fitted the crane with JIC couplings and easily replaceable large slide pads. Before you know it the crane will be back at the jobsite, doing what it does best, creating solutions and versatility for your business.

Front runners in boom design

A Hiab crane is built to withstand extreme loading under all kinds of circumstances, in all field conditions. Keeping the boom reliable, tough and sturdy under extreme loading has made Hiab a world leader in crane boom engineering. Taking a closer look at the crane, one can point out a number of features that our customers benefit from.

Hexagonal boom profile

The hexagonal profile used on Hiab booms is a ground-breaking design introduced by Hiab many years ago. It is now standard throughout the market of loader cranes. Even the smallest of Hiab cranes benefit from this design.



> Load-holding valve

The load-holding valve is a combined hose-failure and load-holding valve which is mounted on the cylinder.

> Hoses internally

The hoses are run internally in the crane body where they are out of harm's way, thus reducing maintenance costs.

> Oil bath

On most Hiab cranes over six tonne meters the slewing mechanism is kept in an oil bath. This keeps the slewing mechanism in great condition throughout the years making sure the crane can be confidently used for extremely demanding applications.

➤ **Hexagonal boom profile**

The hexagonal profile ensures the boom is always in perfect balance, due to its shape and big support surface. The profile also minimizes boom deflection. This reduces maintenance costs and increases efficiency.

➤ **Flexible cylinder positioning**

Some extension cylinders can be positioned on top of the boom, or side mounted. This influences the cranes dimensions and enables easier access to confined spaces.

➤ **JIC couplings**

JIC couplings are standard on most Hiab cranes. They assure secure coupling easily, and are still very easy to disconnect for service.

➤ **Large slide pads**

The hexagonal profile enables the use of larger slide pads. This makes the extensions move smoother and reduces mechanical wear on the boom.

➤ **Attachable tools**

A wide range of attachable tools are available for your Hiab crane. These make sure you can carry out a lot of different tasks.



HIAB 122 CLX Capacity 86,800 ft-lbs (12 tm)

> CLX control system

The CLX control system gives you an excellent and versatile crane, providing all the functionality you need to perform a wide range of general cargo handling tasks. CLX cranes are controlled manually via side controls. There are also optional solutions such as a high seat available. The hydraulic system of a CLX crane features load holding valves with an integrated hose failure function, as well as port relief valves to prevent the crane from over loading. The main control valve is the HIAB Valve 80 which enables the crane to perform more than one crane function at the same time, smoothly and efficiently.

> Valve 80

The HIAB Valve 80 is a top-of-the-line open-center valve based on well-proven technique which gives superb reliability. It features very good dynamic characteristics and performs with ease while slewing and handling numerous operations at the same time. The valve can handle large oil flows, distributing great power to the cylinders and all other hydraulic functions, and yet it can be controlled with high precision.




< Optional E-link

An E-link system is a kind of lever connection between the column and the inner boom, as well as the inner and the outer boom. This is beneficial when lifting heavy loads straight up to high positions, such as scaffolding.

When equipped with an E-link your crane can be fitted with as many as 5 hydraulic extensions, giving you an impressive 49' (15 meter) outreach.

< Side controls

The levers are positioned at the crane base. Cross-controls give the same sequence of levers on both sides. As an option the levers can be positioned at a high seat.

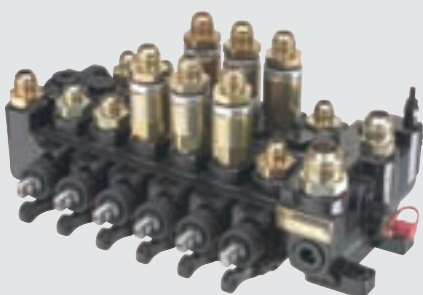

< Valve 80

The HIAB Valve 80 is a top of the line open center valve based on well proven technique which gives superb reliability. The valve handles large oil flows and provides great precision and ease of operation.





Hiab is part of Cargotec Corporation

