



# HIAB 008 T



# HIAB 008 T – a strong choice for the light trucks

The HIAB 008 T is a pocket-size powerhouse. A lightweight of only 105 kg that will nevertheless lift up to 840 kg at minimum radius and 230 kg at 3.8 m outreach.

Why be dependent on an assistant and risk ruining your back when all you need is a HIAB 008 T?


If you choose the remote-controlled version you moreover get the sort of precision in loading and unloading that you could never achieve with manual handling of the goods.

Thanks to the smooth underside of the loader base the crane is easy to mount using four bolts through the truck

deck to the mounting frame. The computer-designed hexagonal boom system of the HIAB 008 T increases stability and strength in combination with low weight.

And it doesn't take up much room when it's folded either. That's because of its well-considered design combined with the use of top-quality materials. In addition, to meet increasingly demanding environmental legislation, the hydraulic system has been specially designed so it can use biodegradable, vegetable-based oil. Worm gear slewing – manual or hydraulic (optional).

The HIAB 008 T. You can't find a better assistant.

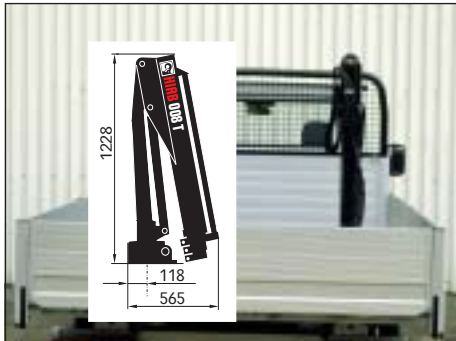


The HIAB 008 T requires the minimum of platform space, and it is so low that it goes in under most pick-up-truck covers.



The control box covers the manoeuvring valve and an aluminum bar protects the control levers.



The O-ring-sealed slewing housing of cast steel with an encased worm gear prevents water and dirt from entering.

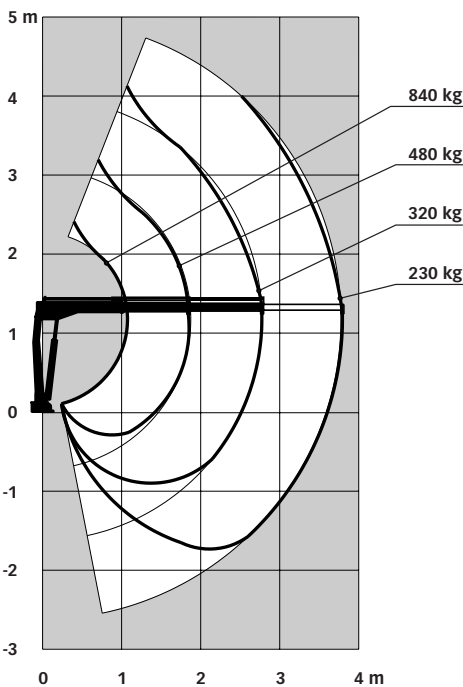

## Technical data

	HIAB 008 T-0	HIAB 008 T-1	HIAB 008 T-2
Capacity class	9.0 kNm (0.9 tm)	9.0 kNm (0.9 tm)	8.8 kNm (0.9 tm)
Outreach, hydraulic	-	1.9 m	2.8 m
Lifting height above base		2.9 m	3.8 m
with manual extension(s)	4.7 m	4.7 m	4.7 m
Outreach/lifting capacity			
	1.10 m/ 840 kg	1.10 m/ 840 kg	1.10 m/ 840 kg
	1.90 m/ 480 kg	1.90 m/ 480 kg	1.90 m/ 480 kg
	2.80 m/ 320 kg	2.80 m/ 320 kg*	2.80 m/ 320 kg
with manual extension(s)	3.80 m/ 230 kg	3.80 m/ 230 kg	3.80 m/ 230 kg
Slewing angle	∞	322°	322°
Weight in standard version	105 kg	125 kg	145 kg
Manual support leg, short/long	12/15 kg	12/15 kg	12/15 kg

\*) with 1 hydraulic and 1 manual boom extension

The HIAB 008 T has been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations have been carried out in accordance with the German DIN norm 15018, crane group B 2. Hiab's CE-marked cranes comply with the EU's Machinery Directive. Hiab's certified Quality Assurance System complies with the ISO 9001.

NOTE. Some of the items we describe in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice.

For complete technical data, consult our folder "HIAB 008 T – Technical Data"

For more information about the HIAB 008 T, or any other Hiab crane, please contact your local Hiab distributor.



The World's No.1 Selling Articulated Crane  
HIAB is a Partek Cargotec Company