

► Multilift XR Power range hooklifts ► **XR21S**




 **MULTILIFT**

www.hiab.com

TECHNICAL DATA

TYPE	XR21S					
VEHICLE TYPE	3 axle					
GVW OF THE VEHICLE (t)	26					
CAPACITY (t)	21					
G-LENGTH	46	51	53	56	59	61
SYSTEM WEIGHT (kg) *	2290	2380	2470	2500	2530	2550
TIPPING ANGLE (°)	50	49	53	53	53	49
MAX. OPERATING PRESSURE (MPa)	30					
RECOMMENDED MAX. OIL FLOW (l/min)	100 (special 150)					

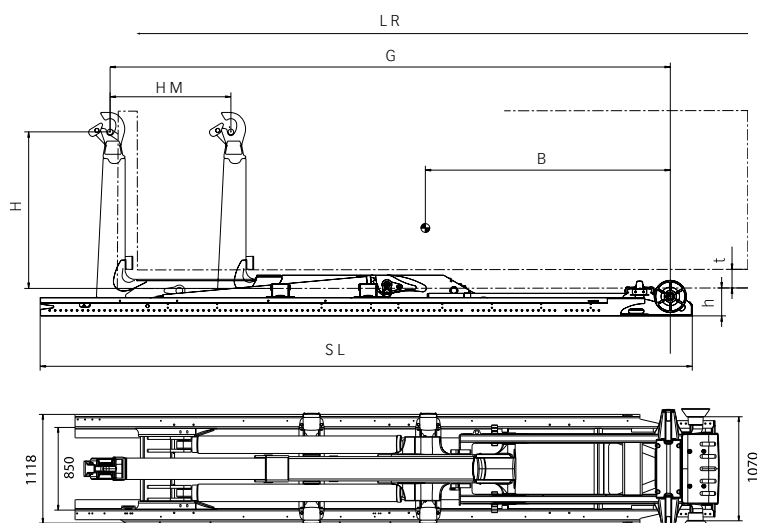

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Multilift dealer.

*** Other hook heights for different body standards available.

Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

PRIMARY DIMENSIONS

MODEL	XR21S.46	XR21S.51	XR21S.53	XR21S.56	XR21S.59	XR21S.61
LR = BODY LENGTH (min-max)	4,0 - 5,6	4,3 - 6,1	4,5 - 6,4	4,5 - 6,6	4,7 - 6,9	4,9 - 7,1
SL = SUBFRAME LENGTH (mm)**	5333	5933	6563	6563	6563	6583
B = CENTRE OF GRAVITY (mm)	2450	2700	2850	2950	3000	3150
G = EXACT G-LENGTH (mm)	4580	5080	5360	5560	5860	6080
HM = HORIZONTAL MOVEMENT (mm)	900	1100	1100	1300	1450	1450
t = MIN. FREE TUNNEL HEIGHT (body)	125 (special 105)					
h = INSTALLATION HEIGHT (mm)	250 (special 270)					
H = HOOK HEIGHT ***	1570					

Contact your local Multilift dealer



A Hiab Company

Multilift Oy

Nesteentie 36, P.O.Box 39, FI-21201, Raisio, Finland

Tel +358 (0) 204 55 2399, Fax +358 (0) 204 55 2231

www.hiab.com