


MULTILIFT XR Power range hooklifts **XR30S**



TECHNICAL DATA

TYPE	XR30S				
VEHICLE TYPE	4 axle (Tandem)				
GVW OF THE VEHICLE (lbs)	60,000+				
CAPACITY (lbs)	66,000 - 86,000				
G-LENGTH	53	56	59	61	63
SYSTEM WEIGHT (lbs) *	6,094	6,138	6,27	6,314	6,402
TIPPING ANGLE (°)	52	53	55	52	49
MAX. OPERATING PRESSURE (MPa)	30				
RECOMMENDED MAX. OIL FLOW (l/min)	120 (special 150)				

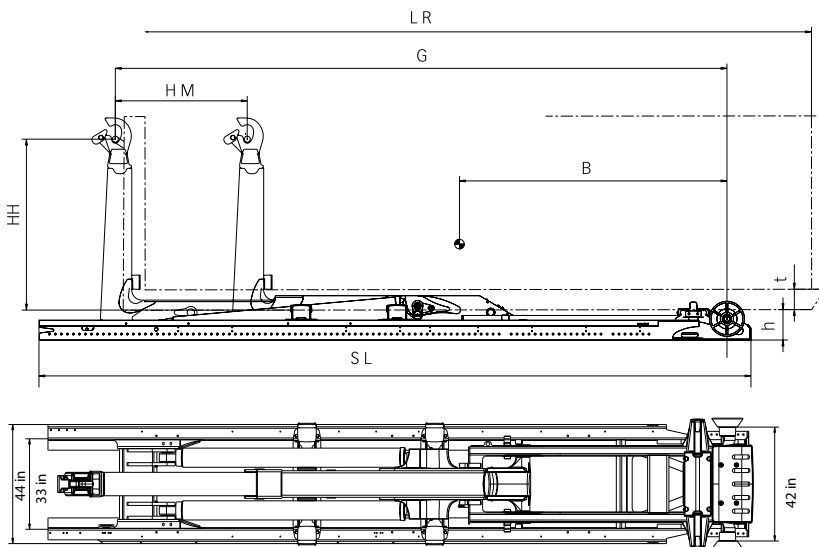

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local MULTILIFT dealer.

MULTILIFT equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

PRIMARY DIMENSIONS

MODEL	XR30S.53	XR30S.56	XR30S.59	XR30S.61	XR30S.63
LR = BODY LENGTH (min-max) (ft) INTERNAL	17 - 21	18 - 22	19 - 23	20 - 24	21 - 25
SL = SUBFRAME LENGTH (ft)**	21.5	21.5	21.5	21.5	22.3
B = CENTRE OF GRAVITY (in)	114	118	122	128	134
G = EXACT G-LENGTH (ft)	17.6	18.2	19.2	19.9	20.7
HM = HORIZONTAL MOVEMENT (in)	43	51	57	57	57
t = MIN. FREE TUNNEL HEIGHT (body) (in)	5				
h = INSTALLATION HEIGHT (in)	10.63				
HH = HOOK HEIGHT (in)	62				



A Hiab brand – part of Cargotec Corporation

Cargotec Finland Oy
 Multilift
 P.O.Box 39, FI-21201, Raisio, Finland
 Tel +358 (0) 204 55 2399
 Fax +358 (0) 204 55 2231
 www.hiab.com