

# Hiab XS 077

## Range 6-8 tm





Basic data

# Hiab XS 077 Basic data

## Technical data

	B-3 CL	E-2 Duo	B-2 HiDuo	E-4 HiDuo
Max. lifting capacity (kNm)	58	60	65	60
Outreach - hydraulic extensions (m)	9.6	7.4	7.6	11.6
Outreach - manual extensions (m)	11.7	11.5	11.3	-
Outreach / Lifting capacity, standard (m / kg)	2.9 / 2050	2.0 / 3100	2.8 / 2600	2.2 / 2900
	3.8 / 1500	3.9 / 1700	3.8 / 1900	4.1 / 1620
	5.4 / 1020	5.5 / 1180	5.4 / 1320	5.7 / 1080
	7.3 / 740	7.4 / 860	7.2 / 980	7.6 / 760
	9.2 / 580	-	-	9.5 / 580
	-	-	-	11.5 / 470
Slewing angle	400 - 406°	400 - 406°	400 - 406°	400 - 406°
Height in folded position (mm)	1900	1915	1900	1915
Width in folded position (mm)	2190	2190	2190	2345
Installation space needed (mm)	700	720	685	720
Weight - "standard" crane without stabilizers (kg)	1060	970	970	1140
Weight - stabilizer equipment (kg)	135 - 205	140 - 285	140 - 285	140 - 285

## Hiab XS 077 E-4 HiDuo

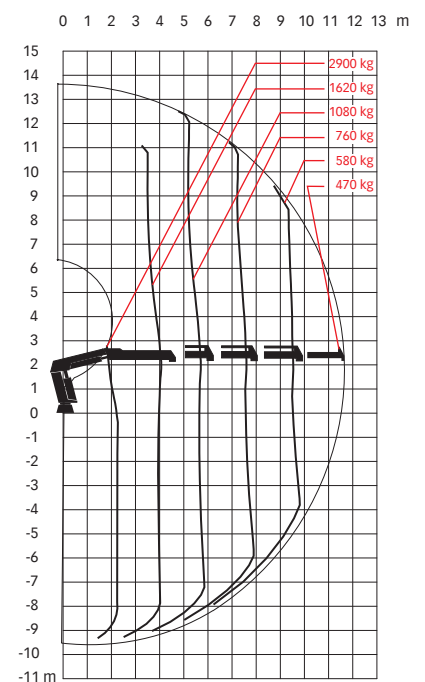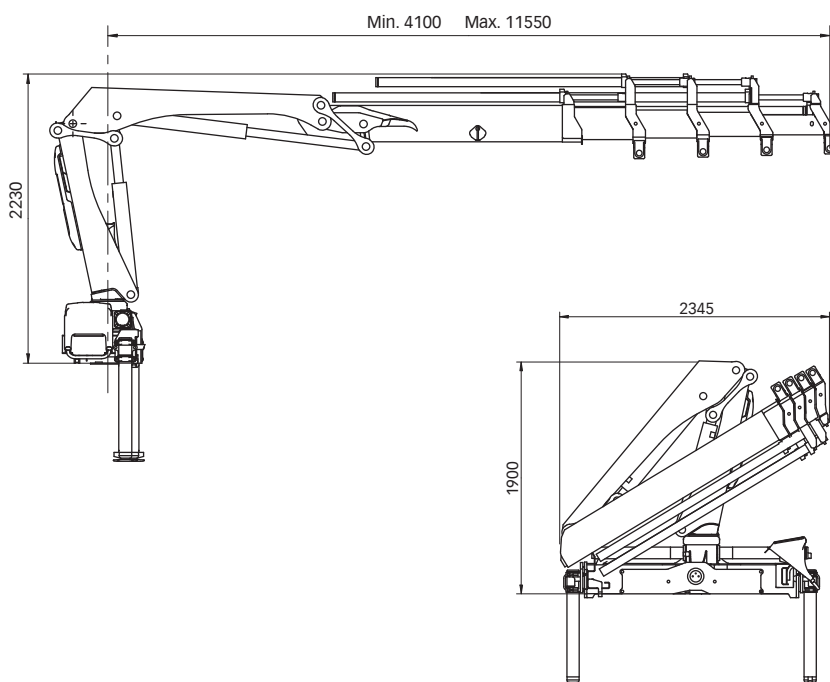

**Atlas Polar**  
IT'S ALL ABOUT QUALITY™

Atlas Polar Company Ltd.  
60 Northline Road  
Toronto, ON M4B 3E5  
Canada  
**1-888-799-4422**  
info@atlaspoler.com  
www.atlaspoler.com